


ZHV-0419L Solenoid Valve

ISO/TS16949 ISO9000 ISO14000
RoHS REACH CE UL VDE TÜV




类型：二位三通 TYPE:Two position two way

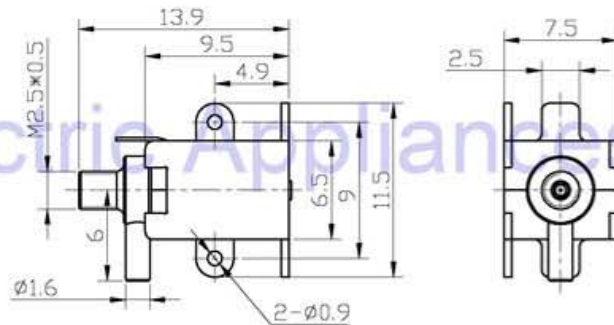

总重量 Total Weight: 17g
应用范围：医疗设备
APPLICATION: MEDICAL TREATMENT EQUIPMENT ETC

单位:mm Units:mm

常闭型/NC



综合特性 GENERAL FEATURES

- 常用压力: 0~7500mmHg/0~10Bar
Pressure: 0~7500mmHg/0~10Bar
- 最小通径: Ø0.2mm
Min Orifice: Ø0.2mm
- 流体介质: 空气, 易挥发液体
Fluid medium: Air, volatile liquid
- 寿命: 典型值为100万次 (on 1s, off 1s)
Lify cycle: 1,000,000 cycles (on 1s, off 1s)
- 绝缘等级: B类
Insulation class: class B

COIL DATA 线圈资料

工作周期(%) = $\frac{\text{工作时间}}{\text{工作时间} + \text{断开时间}} \times 100\%$ Duty cycle(%) = $\frac{\text{"ON" time}}{\text{"ON" time} + \text{"OFF" time}} \times 100\%$	连续 Continuous 100%	间断 Or less 50%	间断 Or less 25%	间断 Or less 10%
最大工作时间(秒) MAX. "on" time in seconds	∞	50	20	3
瓦特(W) (20°C) Watts at 20°C	1.5	3	4.5	12
安匝数AT(20°C) Ampere-turns at 20°C	272	385	471	770

型号 Type no.	阻值(20°C) Resistance (Ω) ±10%	线圈匝数 No. Turns	电压(VDC) Voltage DC			
ZHV-0419L-XX A XX	24	1089	6	6.5	10.4	17
No symbol L S 三通 Three Way 常闭 NC 常开 NO	96	2129	12	17	20.8	34
电压 Voltage (V) 系列号 Serial No.: A, B, C...	384	4257	24	34	41.6	67.9
电阻 Resistance (Ω)						